
CARD SWITCH



Controller

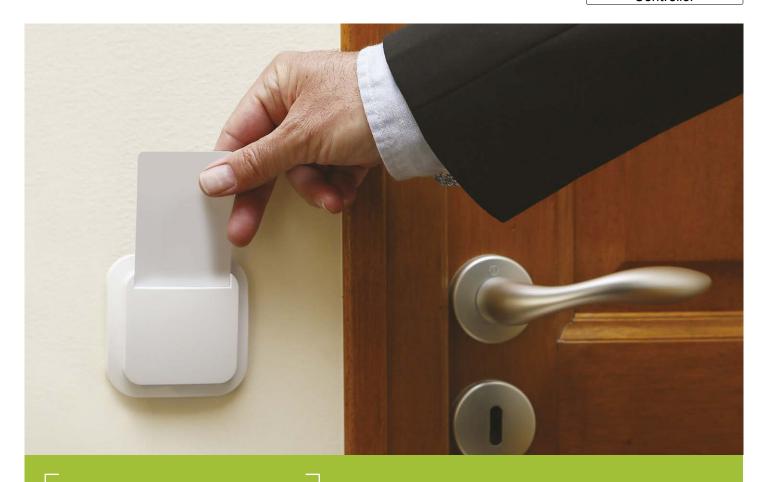

Features

The EnOcean Card Switch is easy to install (wireless, battery-less) to control lighting, roller shutters or even the heating in a room or hotel room. It can also be used as a scenario launcher.



NO BATTERY: NO MAINTENANCE

The Card Switch works thanks to the mechanical energy generated by the card insertion/removal in the reader



NO WIRE:

EASY INSTALLATION, NO DIY WORK

The Card Switch can be installed on all surfaces thanks to its adhesive strips or screws



DEDICATED TO HOTELS

For a custom switch, the card provided with the switch can be replaced by the hotel access card



SMART ACTUATOR

The Card Switch directly works with with EnOcean devices and can act as a scenario launcher, once integrated into a home automation gateway ecosystem



Power source: magneto-resistive (no battery)

2 symmetrical actions based on the insertion and the removal of the card

Wall mounting using adhesive strips (included) or screws (not included)

Radio frequency range: 868.0 to 868.6 MHz or 905 to 915 MHz (according to the reference)

Range: up to 30m indoors
EEP (EnOcean Profile): F6-04-01







List of compatible home automation gateways available on www.nodon.fr


Comfort Automatically turn the light ON when the host enters the home, and turn it OFF when they leave








*Home automation gateway needed



Use

The motion of the card when pairing (insertion or removal) will control your EnOcean actuator

Dimensions



References

Frequency 868 MHz: CCS-2-1-01 - EAN: 3700313920329 - Cozy White

Frequency 905-915 MHz: CCS-2US-1-01 - EAN: 3700313920701 - Cozy White